


DIGITAL OUTSIDE MICROMETER



3109-25A

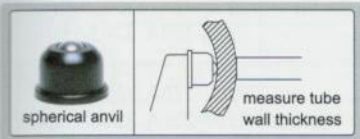


(mm)

Code	Range	Accuracy	L	a	b
3109-25A*	0-25mm/0-1"	$\pm 2\mu\text{m}$	32	6	27.5
3109-50A*	25-50mm/1-2"	$\pm 2\mu\text{m}$	57	8	37
3109-75A*	50-75mm/2-3"	$\pm 3\mu\text{m}$	82	8	50
3109-100A*	75-100mm/3-4"	$\pm 3\mu\text{m}$	107	10	61

* Supplied with manufacturer calibration certificate

BASIC
MODEL

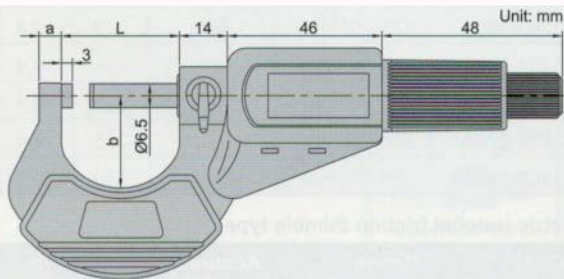

- Resolution 0.001mm/0.00005"
- Button function: on/off, set, mm/inch, ABS/INC
- Without data output
- SR44 or LR44 battery, automatic power off
- Carbide measuring faces
- Ratchet thimble
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")

